

# ZOE

COMPETITION



## Features



### ELECTRONIC AUTO-LEVEL

Through an electronic level probe, the boiler is automatically filled and maintained to the right filling level.



### AUTOMATIC CLEANING CYCLE

Process for coffee groups cleaning.



### ACTIVATED ELECTRONIC PREINFUSION

Management of the delayed activation of water solenoid in the first phase of brewing.



### LED LIGHTING

Allows efficient working in any condition of environmental lighting.



### DOUBLE READING GAUGE

Allows you to control the boiler pressure and the distribution pressure at the same time.



### SHOT TIMER

Allows you to accurately and reliably time coffee extraction.



### EASY SERVICE

Fast access to the internal parts, for quick and easy technical service.



### AISI 316L STAINLESS STEEL "COOL TOUCH" STEAM WANDS

Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.

## Technical data

		2 GROUP STD	2 GROUP TALL 15AMP	2 GROUP TALL 20 AMP	3 GROUP TALL
voltage	V	220 - 240 1N 50 / 60Hz or 380 - 415 3N 50 / 60Hz			
power input	kW	3.15	3.15	4.3	5.8
required amperage	A	15	15	20	25
steam boiler capacity	lt	10	10	10	14
steam boiler element	kW	2.7	2.7	4	5.6
pump power	kW	0.13	0.13	0.13	0.13
net weight	kg	55	59	59	69

### 2 GROUP


2 steam taps	2 steam taps
1 water tap	1 water tap
1 one-cup portafilter	1 one-cup portafilter
2 two-cup portafilters	3 two-cup portafilters

### 3 GROUP




## Versions and Dimensions


### STANDARD

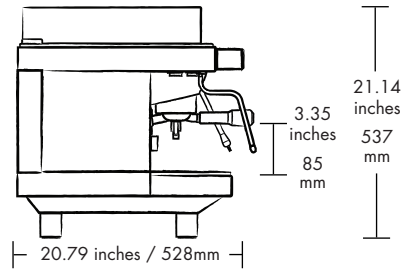


### TALL

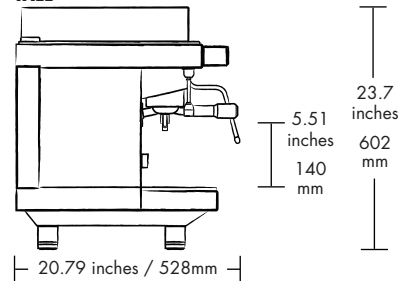



### 2 GROUP

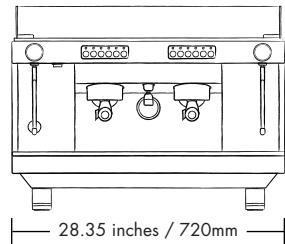

### 3 GROUP

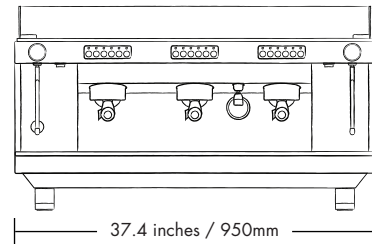

## Easily Customisable Panels

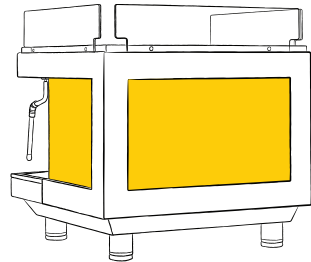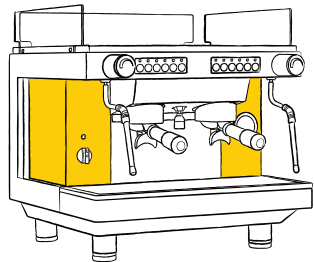

Easily removable panels for full customisability.

## Colours



All images are subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics indicated above.

### CONTACT US

info@sanremomachines.com.au  
sanremomachines.com.au

